

Foam Pad (FP) Dock Seal

Site Survey


NUMBER
OF DOORS

SITE SURVEY INFORMATION

Door Width (W): _____ FT. _____ IN.
Door Height (H): _____ FT. _____ IN.
Dock Height (D): _____ IN.
Bumper Projection (B): _____ IN.
Wall Setback (S): _____ IN.
Leveler Cantilever (C): _____ IN.
Distance Between Doors: _____ IN.


Projections for Typical Dock/Facia Combinations:

Fig A: Bumpers Only "Flush Mount" (B)
 Fig B: Wall Setback (S+B)
 Fig C: Leveler Cantilever (C+B)
 Fig D: Wall Setback AND Leveler Cantilever (S + C + B)

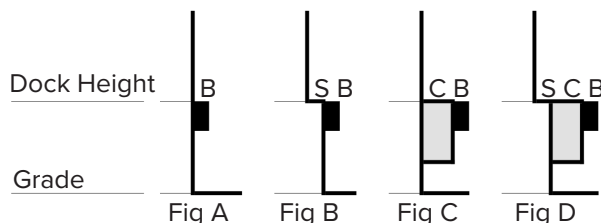

DRIVEWAY GRADE INFORMATION

☐ Level ☐ Decline Grade % _____ ☐ Incline Grade % _____

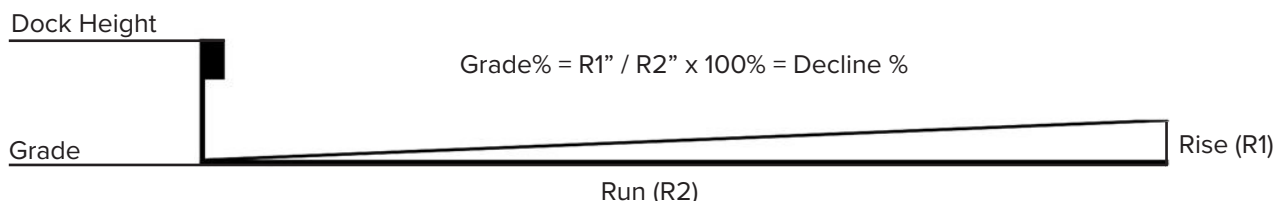

TRUCK/TRAILER INFORMATION

Width: Min _____ Max _____
Height: Min _____ Max _____
Length: Min _____ Max _____

Hydraulic Tailgate: ☐ No ☐ Yes Size _____
Rear Step Section: ☐ No ☐ Yes Size _____
Yard Jockeys: ☐ No ☐ Yes

FP-SERIES OPTIONS

Color: ☐ Black (standard) ☐ Blue* ☐ Brown* ☐ Green* *Only Available in 22 oz & 40 oz

Base Material: ☐ MAX-1000™ ☐ MAX-60™ ☐ 40 oz Vinyl ☐ 22 oz Vinyl
☐ 40 oz NOVALON™** ☐ 16 oz NOVALON™**

*NOVALON™ is the equivalent replacement for HYPALON®, a trade name used by DuPont.

Wear Pleats: ☐ 4" Exposure ☐ 8" Exposure ☐ 16" Exposure ☐ Top Corners Only ☐ None

Drop Curtain: ☐ None ☐ Basic ☐ Add Pull Rope ☐ Add Chain Weight ☐ Add 2" Foam Filled

Bottom Flaps: ☐ None ☐ Inside Only ☐ Inside + Front ☐ Inside, Front + Outside ☐ Length _____ in.

Other Options: ☐ 4' Scuff Guard ☐ Full Height Scuff Guard ☐ Wear Face
☐ Flame-Retardant Fabric None ☐ Galvanized Steel Backers



WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov

W194N11481 McCormick Dr. | Germantown, WI 53022
dlmdocks.com | sales@dlmdocks.com | 800-643-5424

Designed, Engineered, and Manufactured in the U.S.A.

© 2025 Systems, LLC/DLM

Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

SITE FP 07/2025

A Division of Systems, LLC