

SS Dock Shelter

SPECIFICATIONS



PRODUCT SUMMARY

Soft Sided Series Dock Shelter—provides maximum dock protection and full access to trailers while minimizing pressure on the building wall. The Dock Shelter has soft foam sides for added flexibility and is able to compress and bend out of the way of a truck that approaches the doorway off-center or misaligns with the dock. It is designed to be pliable to prevent damage, downtime and costly repairs.

FEATURES

- Flexible side pad structure protects the unit against damage from off-center trailers
- High-density polyurethane foam for added resiliency
- Frame is made from pressure-treated, kiln-dried wood
- Foam is bonded to the frame with high-strength adhesive
- Available in several top-grade fabric types, weights and colors
- Raked header with a translucent fiberglass top
- Face curtains have fiberglass stays for added rigidity
- Aluminum angle face edging on the head frame
- Dectachable side curtains and draft pads have Velcro® for easy removal
- Heavy-duty galvanized mounting hardware
- Wind straps on the head curtain keep it from being blown out of position
- All sew lines are lock-stitched and reinforced with UV-resistant thread
- 15" yellow guide stripe

TRUCKS & TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Type of Trailer: Standard Refrigerated

Hydraulic Liftgate: Yes _____" No

Rear Step Section: Yes _____" No

Yard Jockey: Yes No

Metal Building: Yes No

PROJECT INFORMATION

Customer: _____

Job: _____

Location: _____

Number of Units: _____

Represented By: _____

Sales Rep: _____

APPLICATION DATA

Door Width: _____ FT. _____ IN.

Door Height: _____ FT. _____ IN.

Dock Height: _____ FT. _____ IN.

Bumper Projection: _____ IN.

Wall Setback (S): _____ IN.

Leveler Cantilever (C): _____ IN.

Distance Between Doors: _____ IN.

Level

Decline Grade % _____

Incline Grade % _____


CERTIFIED FOR CONSTRUCTION

By: _____

Date: _____

Company: _____

City & State: _____

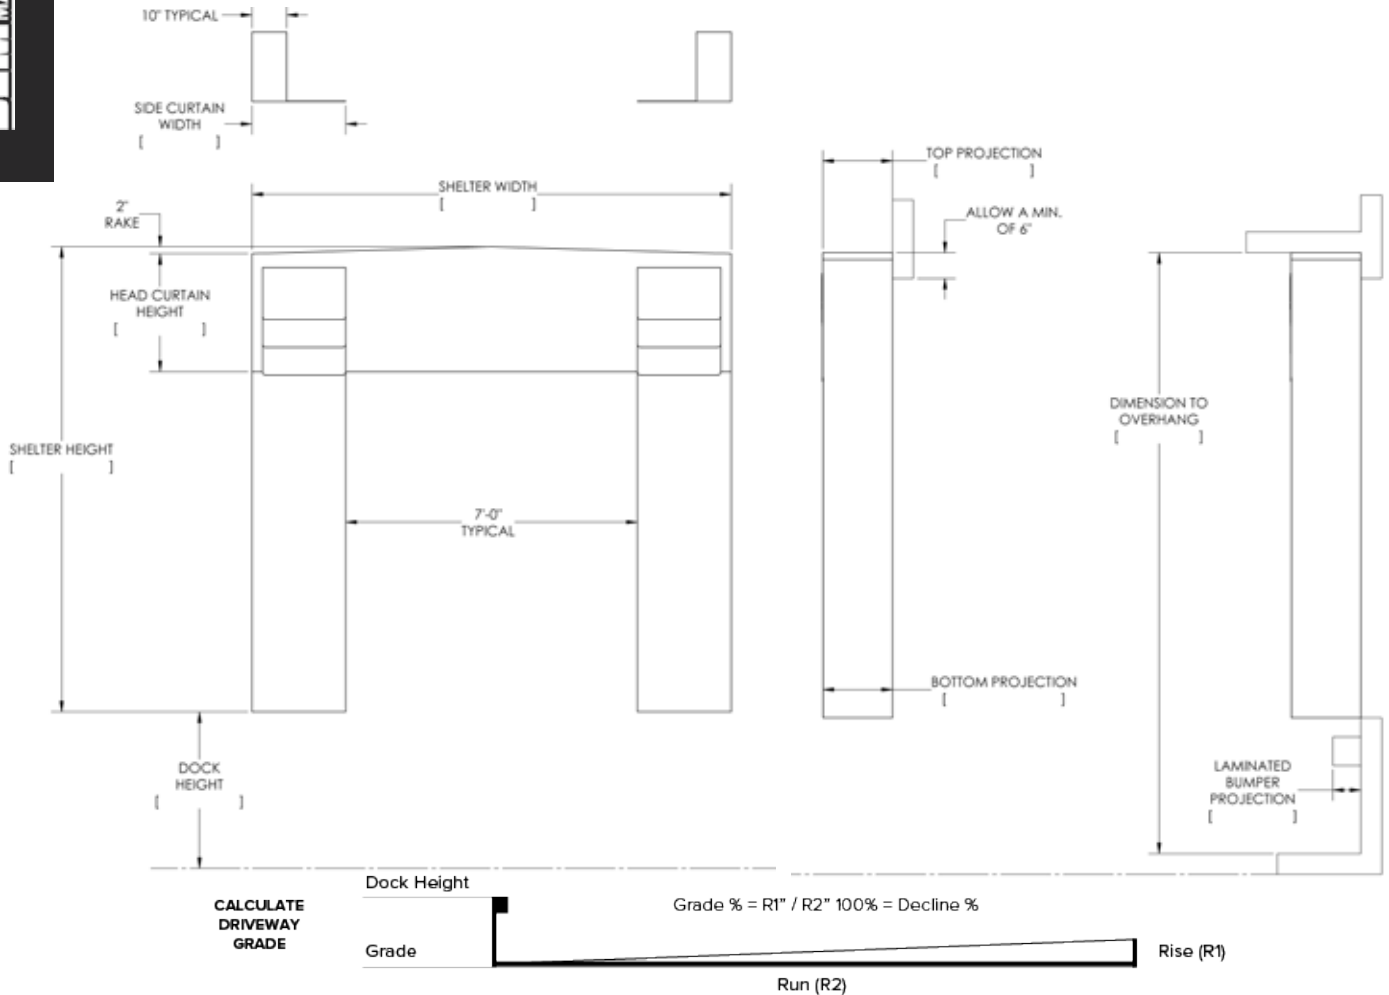

SS-SERIES OPTIONS

- HEAD FRAME** Width 132 138 144 Other _____ IN.
-
- HEAD FRAME** Options
- Materials Wood Galvanized Steel Channel
- Shape Raked Flat
- Head Curtain Drop 30 36 42 48 54 Other _____ IN.
-
- HEAD CURTAIN** Options
- Head Curtain Splits None 12 18 Other _____ IN.
- Pull Rope Kit None Option Only with Splits
- Side Pad Height 126" Other _____ IN.
- Side Frame Option Galvanized Backer
- Curtain Material 22oz 40oz Nova Max60 Nova Max1000 Novalon 16oz Novalon 40oz
- Color Black (All) Blue (22oz, 40oz) Brown (22oz, 40oz) Green (22oz, 40oz)
- Curtain Options 15" Guide Stripes Full Length Guide Stripes No Guide Stripes
- Flame-Retardant Fabric ONLY 22oz Black 40oz Black
-
- Top Projection 20 24 30 Other _____ IN.
- Bottom Projection 20 24 30 Other _____ IN. Other _____ IN.
-
- Blockout None 6 8 10 12
- Side Pad Mounting Brackets Angles Only Angles & Flats Angles & Offsets
- LOGO** DLM Blank Private Label