

GS Dock Shelter

SPECIFICATIONS



PRODUCT SUMMARY

GS Series Dock Shelter—engineered for use with swing-door trailers, the GS Dock Shelter seals the air and light gaps at door hinges while still allowing full access into the trailer. This shelter provides maximum dock protection while minimizing pressure on the building wall. Utilizing foam side pads in its construction, the shelter is capable of compressing and bending out of the way of a truck that approaches the dock off-center preventing costly repairs.

FEATURES

- Durable rubber trim blocks air and light gaps
- Flexible side pad structure protects the unit against damage from off-center trailers
- High-density polyurethane foam for added resiliency
- Frame is made from pressure-treated, kiln-dried wood
- Foam is bonded to the frame with high-strength adhesive
- Available in several top-grade fabric types, weights and colors
- Raked header with a translucent fiberglass top
- Face curtains have fiberglass stays for added rigidity
- Aluminum angle face edging on the head frame
- Detachable side curtains and draft pads have Velcro® for easy removal
- Heavy-duty galvanized mounting hardware
- Wind straps on the head curtain keep it from being blown out of position
- All sew lines are lock-stitched and reinforced with UV-resistant thread
- 15-inch yellow guide stripe

TRUCKS & TRAILERS SERVICED

Width:	_____ Max.	_____ Min.
Height:	_____ Max.	_____ Min.
Length:	_____ Max.	_____ Min.
Type of Trailer:	Standard	Refrigerated
Hydraulic Liftgate:	Yes _____	No
Rear Step Section:	Yes _____	No
Yard Jockey:	Yes	No
Metal Building:	Yes	No

PROJECT INFORMATION

Customer: _____

Job: _____

Location: _____

Number of Units: _____

Represented By: _____

Sales Rep: _____

APPLICATION DATA

Door Width: _____ FT. _____ IN.

Door Height: _____ FT. _____ IN.

Dock Height: _____ FT. _____ IN.

Bumper Projection: _____ IN.

Wall Setback (S): _____ IN.

Leveler Cantilever (C): _____ IN.

Distance Between Doors: _____ IN.

☐ Level

☐ Decline Grade % _____

☐ Incline Grade % _____

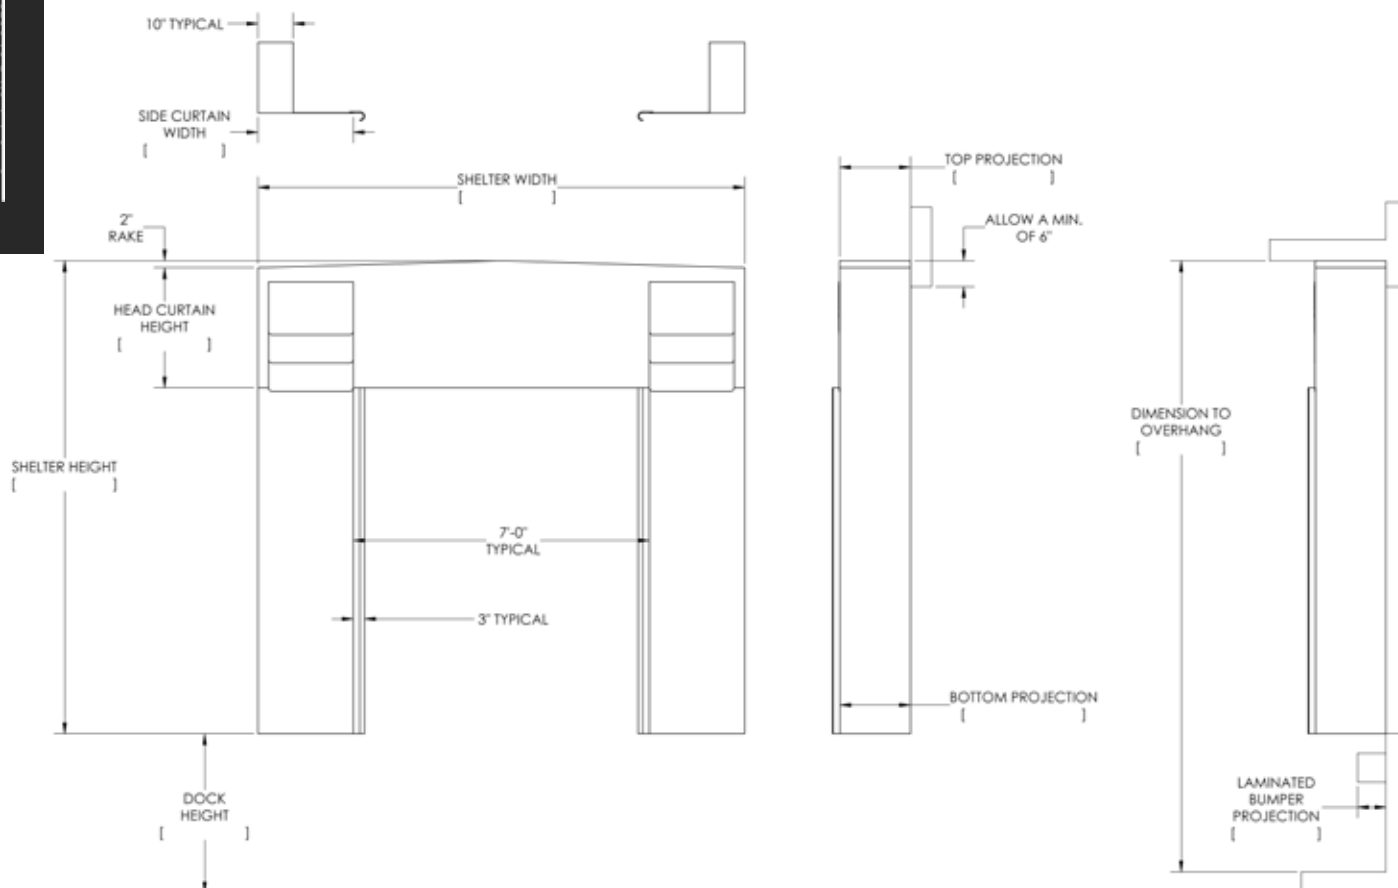
CERTIFIED FOR CONSTRUCTION

By: _____

Date: _____

Company: _____

City & State: _____

**GS-SERIES OPTIONS**

HEAD FRAME Width ☐ 132 ☐ 138 ☐ 144 ☐ Other _____ IN.

HEAD FRAME Options

Materials

☐ Wood ☐ Galvanized Steel Channel

Shape

☐ Raked ☐ Flat

Head Curtain Drop

☐ 30 ☐ 36 ☐ 42 ☐ 48 ☐ 54 ☐ Other _____ IN.**HEAD CURTAIN** Options

Head Curtain Splits

☐ None ☐ 12 ☐ 18 ☐ Other _____ IN.

Pull Rope Kit

☐ None ☐ Option Only with Splits**SIDE PAD** Height☐ 126" ☐ _____ Total (IN)

Curtain Material

☐ 22oz ☐ 40oz ☐ Nova Max60 ☐ Nova Max1000 ☐ Novalon 16oz ☐ Novalon 40oz

Color

☐ Black (All) ☐ Blue (☐ 22oz, ☐ 40oz) ☐ Brown (☐ 22oz, ☐ 40oz) ☐ Green (☐ 22oz, ☐ 40oz)

Curtain Options

☐ 15" Guide Stripe ☐ Full-Length Guide Stripes ☐ No Guide Strips

Side Pad Backer Option

☐ Galvanized

Top Projection

☐ 20 ☐ Other _____ (IN)

Bottom Projection

☐ 20 ☐ Other _____ (IN)

Blockout

☐ None ☐ 6 ☐ 8 ☐ 10 ☐ 12 ☐ Other _____ (IN)

Side Pad Mounting Brackets

☐ Angles Only ☐ Angles & Flats ☐ Angles & OffsetsFlame-Retardant ONLY☐ 22oz Black ☐ 40oz Black**LOGO**☐ DLM ☐ Blank ☐ Private Label