



The Dock Alert Communication System is a simple, reliable, and cost effective warning system. The Dock Alert Communication System establishes a clear line of communication between truck drivers and dock personnel, thereby reducing the risk of accidents at the loading dock.



Dock Alert Communication System Design Features...

- Visual communication between dock attendant and truck driver.
- Instinctive red and green communication lights.
- Interior mounted, Nema 12 control panel with operator instruction.
- Exterior, compact “traffic style” light fixture with integral sun visors.
- Yellow, polypropylene exterior light fixture will not rust, pit or corrode.
- “High Visibility” exterior caution signs.

Dock Alert Communication System

Effective Safety Communication

The Dock Alert communication system is an ideal way for dock personnel to communicate to truck drivers and yard jockeys. The instinctive red and green light system on the interior control panel and exterior light fixture work in opposing modes. When the outside light flashes red, an indication to the truck driver he should not pull away, the interior light is green indicating to the dock attendant the loading/unloading can begin. Activation of the Dock Alert can be manual or automatic, by purchasing one of the two popular Dock Alert packages.

Combine with Your Dock Leveler

Dock Alert can be integrated into a single control enclosure with your air powered or hydraulic leveler. Optional interconnections can assure proper procedure and enhance safety at the loading dock.



Manual Restraint Automatic Dock Alert Air Powered Dock Leveler 12" x 12" Control Box

Technical Specifications...

Exterior Light Housing	Safety Yellow Polypropylene, UL Listed/Recognized
Power Consumption (incandescent)	0.47 Amps @120 Volts AC
	0.06 Amps @ 120 Volts AC (LED)
Bulbs	Standard: Incandescent
	Optional: LED
Lens Diameter	4 1/4"
Dimensions	11 3/4"H x 6 3/8"W x 3 3/4"D
Interior Control Panel	Nema12, UL Listed/Recognized
Dimensions	8"x8"
Exterior Signs	Safety Yellow All Weather Plastic
Dimensions	16 7/8"H x 8"W
Shipping Weight	7 lb.



Optional LED Exterior Light can bulb life up to five years, substantially reducing maintenance time and expense.



Dock Alert^{ML} – Manually Activation


Dock personnel control the light activation by manually switching a selector switch between "Do Not Service Trailer" and "Service Trailer" positions.

Dock Alert^{AL} – Automatic Operating

In the "On" position, lights can automatically change by positioning of the overhead door. A fixed field proximity switch or mechanical limit switch is required and can be owner supplied or purchased as an option.



Optional fixed field proximity switch for door interlock

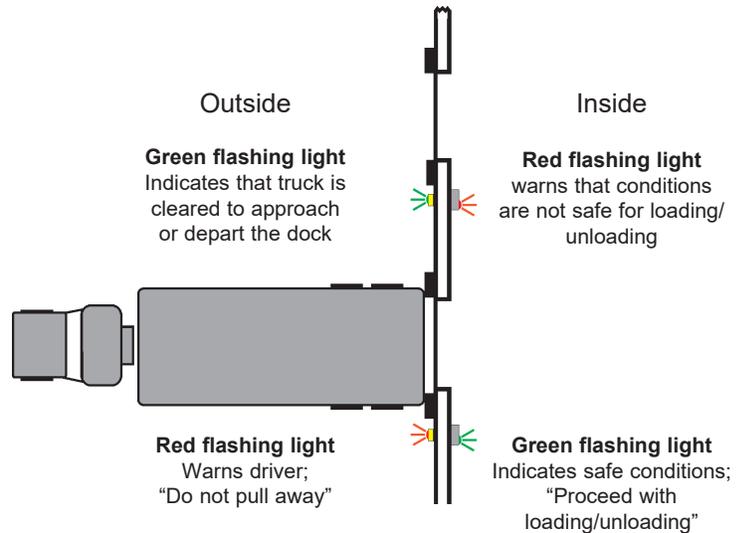

Designed, Engineered & Manufactured in the U.S.A.

Distributed By:

