


DA Series

Air-Powered Dock Leveler

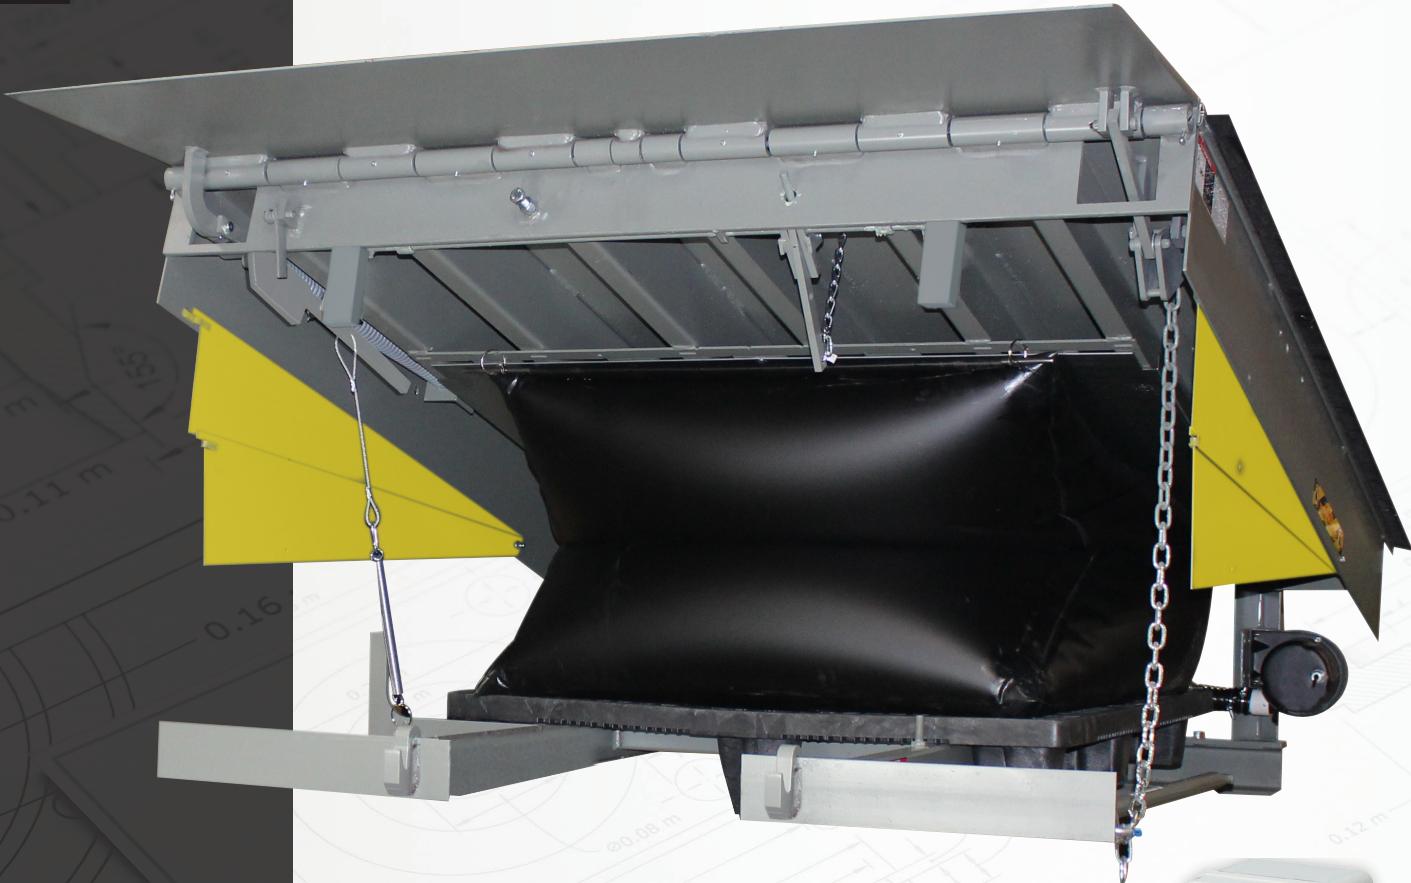

25K - 50K
CIR | **6' - 7'** WIDTH | **6' - 10'** LENGTH

FEATURES

- Simple, push-button activation
- High-volume, low-pressure activation system
- Four-sided box-construction deck assembly
- 115-volt, single-phase power
- 16" lip plate
- Multi-position structural-steel safety legs
- Below-dock end-loading control
- Lockout/tagout maintenance strut
- Night locks/cross traffic support
- Lip supporting service strut
- Safety-yellow full-range toe guards
- Two (2) B410-14 laminated bumpers
- Designed and manufactured in the USA

Connect online
with

myQ®
Enterprise

DA Series, 7' x 8', 40,000 CIR

Value Engineered
Dock Levelers

DA Series

Air-Powered Dock Leveler

25K - 50K
CIR

6' - 7'
WIDTH

6' - 10'
LENGTH

OPERATION

The DLM DA Series Leveler utilizes an air bag lifting mechanism with push-button activation to raise the leveler and automatically extend the lip. The standard lip is 16", with an operating range of 12" above and below dock level. The platform is designed to compensate for canted truck beds up to 4" and remain flush with the dock floor.

SAFETY FEATURES

- Dual-pivoting, cross-traffic legs for multi-position safety in the event of early departure
- Built-in lockout/tagout maintenance inspection strut
- Full-range toe guards close off sides at the highest position
- Lip keepers for cross-traffic support and automatic night lock security against theft



High-volume, low-pressure air blower to efficiently raise the leveler.

VEHICLE RESTRAINTS & ACCESSORIES

For enhanced safety, all DLM levelers can be equipped with light communication, iDock Controls, and vehicle restraints, which help prevent unexpected trailer departure from the loading dock. Safety barriers are also available to prevent forklift trucks from driving over the dock edge.

CONSTRUCTION

The DA Series is designed with dependability and toughness in mind for medium to heavy-duty applications. All DLM levelers are built with a durable four-sided box construction. The use of structural-steel C-channels or I-beams create substantially more deck support than other levelers.



DA SERIES COMMON OPTIONS

- 3-wheel offset forklift protection
- Custom interlocking
- Dock alert light communication system
- Dock lights
- Extended lip sizes (18" and 20")
- Foam insulated deck
- Integrated control panel
- Safety barrier lip
- Vehicle restraint
- Weather seal (brush or rubber)



W194N11481 McCormick Dr. | Germantown, WI 53022

dlmdocks.com | sales@dlmdocks.com

800-643-5424



dlmdocks.com

Designed, Engineered, and Manufactured in the U.S.A.

© 2026 Systems, LLC/DLM

Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

A Division of Systems, LLC

DLM
DOCK LEVELER
MANUFACTURING

Value Engineered
Dock Levelers